

AUTOMATIC HOSE REELS VARNISHED FIXED FOR AIR-WATER 20 bar

Equipped with:

- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



F-400

Article	Hose length	Ø hose	Inlet-outlet
070-1201-300	Without hose	-	F3/8"G - M3/8"G
070-1201-400	Without hose	-	M1/2"G - M1/2"G
070-1201-215	15 m	8x12	F3/8"G - M1/4"G gir.
070-1201-220	20 m	8x12	F3/8"G - M1/4"G gir.
070-1201-310	10 m	10x14	F3/8"G - M3/8"G
070-1201-315	15 m	10x14	F3/8"G - M3/8"G
070-1201-410	10 m	13x19	M1/2"G - M1/2"G




F-460

070-1301-400	Without hose	-	M1/2"G - M1/2"G
070-1301-320	20 m	10x14	M1/2"G - M3/8"G
070-1301-415	15 m	13x19	M1/2"G - M1/2"G
070-1301-418	18 m	13x19	M1/2"G - M1/2"G




F-550

070-1401-400	Without hose	-	M1/2"G - M1/2"G
070-1401-420	20 m	13x19	M1/2"G - M1/2"G
070-1401-425	25 m	13x19	M1/2"G - M1/2"G

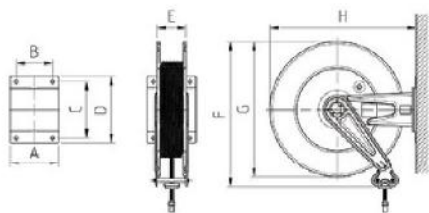


OVERALL DIMENSIONS FIXED


Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<28,00	0,085	1

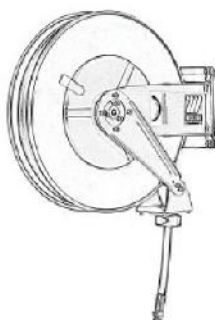


Wall application with
inside output hose

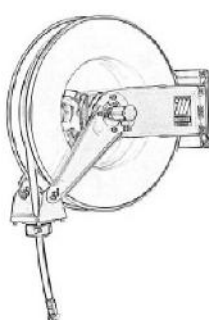

Wall application with
outside output hose



Wall and ceiling application
with frontal output hose



Application bench with
frontal output hose

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR AIR-WATER 20 bar



Equipped with:

- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

Article	Hose length	Ø hose	Inlet-outlet
071-1201-300	Without hose	-	F3/8"G - M3/8"G
071-1201-400	Without hose	-	M1/2"G - M1/2"G
071-1201-215	15 m	8x12	F3/8"G - M1/4"G gir.
071-1201-220	20 m	8x12	F3/8"G - M1/4"G gir.
071-1201-310	10 m	10x14	F3/8"G - M3/8"G
071-1201-315	15 m	10x14	F3/8"G - M3/8"G
071-1201-410	10 m	13x19	M1/2"G - M1/2"G

S-400



071-1301-400	Without hose	-	M1/2"G - M1/2"G
071-1301-320	20 m	10x14	M1/2"G - M3/8"G
071-1301-415	15 m	13x19	M1/2"G - M1/2"G
071-1301-418	18 m	13x19	M1/2"G - M1/2"G

S-460





071-1401-400	Without hose	-	M1/2"G - M1/2"G
071-1401-420	20 m	13x19	M1/2"G - M1/2"G
071-1401-425	25 m	13x19	M1/2"G - M1/2"G

S-550




OVERALL DIMENSIONS SWIVELLING


Mod.	A	B	C	D	E	F	G	H	Kg	m³	Nº
S-400	150	120	168	196	95	450	400	510	13,50<20,50	0,046	1
S-460	150	120	168	196	95	480	460	575	17,50<24,00	0,060	1
S-550	200	150	225	270	120	590	550	680	23,00<29,00	0,085	1

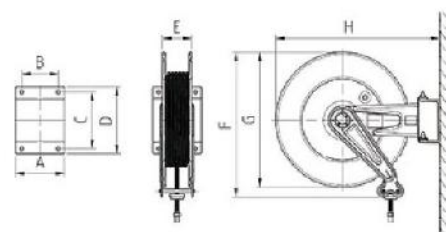


Wall application with
inside output hose



Wall application with
outside output hose



Wall and ceiling application
with frontal outside hose



The insertion of the hose reel
in the wall bracket is with
quick disconnect coupling

AUTOMATIC HOSE REELS VARNISHED FIXED FOR AIR-WATER 20 bar

Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



F-400



F-460



F-550



F-555



F-560

Article	Hose length	Ø hose	Inlet-outlet
070-1201-300	Without hose	-	F3/8"G - M3/8"G
070-1201-400	Without hose	-	M1/2"G - M1/2"G
070-1202-212	12 m	5/16"	F3/8"G - M1/4"G
070-1202-218	18 m	5/16"	F3/8"G - M1/4"G
070-1202-310	10 m	3/8"	F3/8"G - M3/8"G
070-1202-318	18 m	3/8"	F3/8"G - M3/8"G
070-1202-410	10 m	1/2"	M1/2"G - M1/2"G

070-1301-400	Without hose	-	M1/2"G - M1/2"G
070-1302-320	20 m	3/8"	M1/2"G - M3/8"G
070-1302-415	15 m	1/2"	M1/2"G - M1/2"G
070-1302-418	18 m	1/2"	M1/2"G - M1/2"G


070-1401-400	Without hose	-	M1/2"G - M1/2"G
070-1402-420	20 m	1/2"	M1/2"G - M1/2"G
070-1402-425	25 m	1/2"	M1/2"G - M1/2"G

070-1502-400	Without hose	-	M1/2"G - M1/2"G
070-1502-600	Without hose	-	F1"G - M1"G
070-1502-430	30 m	1/2"	M1/2"G - M1/2"G
070-1502-515	15 m	3/4"	F3/4"G - M3/4"G
070-1502-520	20 m	3/4"	F3/4"G - M3/4"G
070-1502-615	15 m	1"	F1"G - M1"G

070-1602-600	Without hose	-	F1"G - M1"G
070-1602-530	30 m	3/4"	F3/4"G - M3/4"G
070-1602-540	40 m	3/4"	F3/4"G - M3/4"G
070-1602-620	20 m	1"	F1"G - M1"G
070-1602-630	30 m	1"	F1"G - M1"G

OVERALL DIMENSIONS FIXED

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,085	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,100	1
F-560	440	390	225	270	360	590	550	600	33,00<83,00	0,180	1

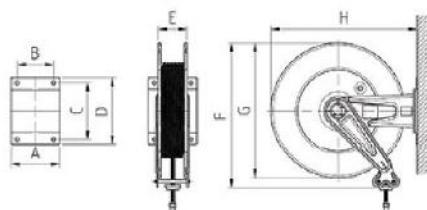

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR AIR-WATER 20 bar



Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

Article	Hose length	Ø hose	Inlet-outlet
071-1201-300	Without hose	-	F3/8"G - M3/8"G
071-1201-400	Without hose	-	M1/2"G - M1/2"G
071-1202-212	12 m	5/16"	F3/8"G - M1/4"G
071-1202-218	18 m	5/16"	F3/8"G - M1/4"G
071-1202-310	10 m	3/8"	F3/8"G - M3/8"G
071-1202-318	18 m	3/8"	F3/8"G - M3/8"G
071-1202-410	10 m	1/2"	M1/2"G - M1/2"G

071-1301-400	Without hose	-	M1/2"G - M1/2"G
071-1302-320	20 m	3/8"	M1/2"G - M3/8"G
071-1302-415	15 m	1/2"	M1/2"G - M1/2"G
071-1302-418	18 m	1/2"	M1/2"G - M1/2"G

071-1401-400	Without hose	-	M1/2"G - M1/2"G
071-1402-420	20 m	1/2"	M1/2"G - M1/2"G
071-1402-425	25 m	1/2"	M1/2"G - M1/2"G

071-1502-400	Without hose	-	M1/2"G - M1/2"G
071-1502-600	Without hose	-	F1"G - M1"G
071-1502-430	30 m	1/2"	M1/2"G - M1/2"G
071-1502-515	15 m	3/4"	F3/4"G - M3/4"G
071-1502-520	20 m	3/4"	F3/4"G - M3/4"G
071-1502-615	15 m	1"	F1"G - M1"G

S-400



S-460



S-550




S-555



OVERALL DIMENSIONS SWIVELLING

Mod.	A	B	C	D	E	F	G	H			
S-400	150	120	168	196	95	450	400	510	13,50<20,50	0,046	1
S-460	150	120	168	196	95	480	460	575	17,50<24,00	0,060	1
S-550	200	150	225	270	120	590	550	680	23,00<45,00	0,085	1
S-555	250	200	225	270	170	590	550	680	27,00<54,00	0,100	1

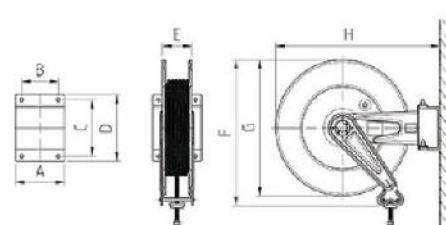

AUTOMATIC HOSE REELS VARNISHED FIXED FOR WATER 150 °C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

F-400

Article	Hose length	Ø hose	Inlet-outlet
070-1205-300	Without hose	-	M3/8"G - M3/8"G
070-1205-400	Without hose	-	M1/2"G - M1/2"G
070-1204-210	10 m	5/16"	M3/8"G - F3/8"G
070-1204-215	15 m	5/16"	M3/8"G - F3/8"G
070-1204-310	10 m	3/8"	M3/8"G - F3/8"G
070-1204-410	10 m	1/2"	M1/2"G - F1/2"G

F-460

070-1305-300	Without hose	-	M3/8"G - M3/8"G
070-1305-400	Without hose	-	M1/2"G - M1/2"G
070-1304-220	20 m	5/16"	M3/8"G - F3/8"G
070-1304-315	15 m	3/8"	M3/8"G - F3/8"G
070-1304-318	18 m	3/8"	M3/8"G - F3/8"G
070-1304-415	15 m	1/2"	M1/2"G - F1/2"G

F-550

070-1405-300	Without hose	-	M3/8"G - M3/8"G
070-1405-400	Without hose	-	M1/2"G - M1/2"G
070-1404-320	20 m	3/8"	M3/8"G - F3/8"G
070-1404-325	25 m	3/8"	M3/8"G - F3/8"G
070-1404-420	20 m	1/2"	M1/2"G - F1/2"G

F-555


070-1505-300	Without hose	-	M3/8"G - M3/8"G
070-1505-400	Without hose	-	M1/2"G - M1/2"G
070-1504-330	30 m	3/8"	M3/8"G - F3/8"G
070-1504-425	25 m	1/2"	M1/2"G - F1/2"G
070-1504-430	30 m	1/2"	M1/2"G - F1/2"G

F-560

070-1605-400	Without hose	-	M1/2"G - M1/2"G
070-1604-340	40 m	3/8"	M1/2"G - F3/8"G
070-1604-440	40 m	1/2"	M1/2"G - F1/2"G

OVERALL DIMENSIONS FIXED

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,085	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,100	1
F-560	440	390	225	270	360	590	550	600	33,00<83,00	0,180	1

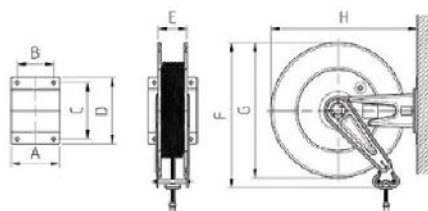

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR WATER 150 °C 200 bar



Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

Article	Hose length	Ø hose	Inlet-outlet
071-1205-300	Without hose	-	M3/8"G - M3/8"G
071-1205-400	Without hose	-	M1/2"G - M1/2"G
071-1204-210	10 m	5/16"	M3/8"G - F3/8"G
071-1204-215	15 m	5/16"	M3/8"G - F3/8"G
071-1204-310	10 m	3/8"	M3/8"G - F3/8"G
071-1204-410	10 m	1/2"	M1/2"G - F1/2"G

071-1305-300	Without hose	-	M3/8"G - M3/8"G
071-1305-400	Without hose	-	M1/2"G - M1/2"G
071-1304-220	20 m	5/16"	M3/8"G - F3/8"G
071-1304-315	15 m	3/8"	M3/8"G - F3/8"G
071-1304-318	18 m	3/8"	M3/8"G - F3/8"G
071-1304-415	15 m	1/2"	M1/2"G - F1/2"G

071-1405-300	Without hose	-	M3/8"G - M3/8"G
071-1405-400	Without hose	-	M1/2"G - M1/2"G
071-1404-320	20 m	3/8"	M3/8"G - F3/8"G
071-1404-325	25 m	3/8"	M3/8"G - F3/8"G
071-1404-420	20 m	1/2"	M1/2"G - F1/2"G

071-1505-300	Without hose	-	M3/8"G - M3/8"G
071-1505-400	Without hose	-	M1/2"G - M1/2"G
071-1504-330	30 m	3/8"	M3/8"G - F3/8"G
071-1504-425	25 m	1/2"	M1/2"G - F1/2"G
071-1504-430	30 m	1/2"	M1/2"G - F1/2"G

S-400



S-460



S-550




S-555



OVERALL DIMENSIONS SWIVELLING

Mod.	A	B	C	D	E	F	G	H	 Kg	 m³	 №
S-400	150	120	168	196	95	450	400	510	13,50<20,50	0,046	1
S-460	150	120	168	196	95	480	460	575	17,50<24,00	0,060	1
S-550	200	150	225	270	120	590	550	680	23,00<45,00	0,085	1
S-555	250	200	225	270	170	590	550	680	27,00<54,00	0,100	1

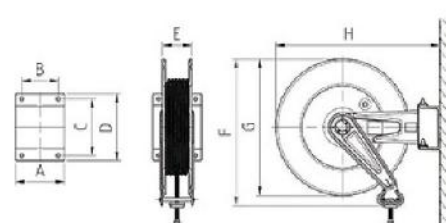

AUTOMATIC HOSE REELS VARNISHED FIXED FOR WATER 150 °C 400 bar

Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



F-400



F-460



F-550



F-555



F-560

Article	Hose length	Ø hose	Inlet-outlet
070-1205-300	Without hose	-	M3/8"G - M3/8"G
070-1205-400	Without hose	-	M1/2"G - M1/2"G
070-1205-210	10 m	5/16"	M3/8"G - F3/8"G
070-1205-215	15 m	5/16"	M3/8"G - F3/8"G
070-1205-310	10 m	3/8"	M3/8"G - F3/8"G
070-1205-410	10 m	1/2"	M1/2"G - F1/2"G

070-1305-300	Without hose	-	M3/8"G - M3/8"G
070-1305-400	Without hose	-	M1/2"G - M1/2"G
070-1305-220	20 m	5/16"	M3/8"G - F3/8"G
070-1305-315	15 m	3/8"	M3/8"G - F3/8"G
070-1305-318	18 m	3/8"	M3/8"G - F3/8"G
070-1305-415	15 m	1/2"	M1/2"G - F1/2"G


070-1405-300	Without hose	-	M3/8"G - M3/8"G
070-1405-400	Without hose	-	M1/2"G - M1/2"G
070-1405-320	20 m	3/8"	M3/8"G - F3/8"G
070-1405-325	25 m	3/8"	M3/8"G - F3/8"G
070-1405-420	20 m	1/2"	M1/2"G - F1/2"G

070-1505-300	Without hose	-	M3/8"G - M3/8"G
070-1505-400	Without hose	-	M1/2"G - M1/2"G
070-1505-330	30 m	3/8"	M3/8"G - F3/8"G
070-1505-425	25 m	1/2"	M1/2"G - F1/2"G
070-1505-430	30 m	1/2"	M1/2"G - F1/2"G

070-1605-400	Without hose	-	M1/2"G - M1/2"G
070-1605-340	40 m	3/8"	M1/2"G - F3/8"G
070-1605-440	40 m	1/2"	M1/2"G - F1/2"G

OVERALL DIMENSIONS FIXED

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,085	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,100	1
F-560	440	390	225	270	360	590	550	600	33,00<83,00	0,180	1

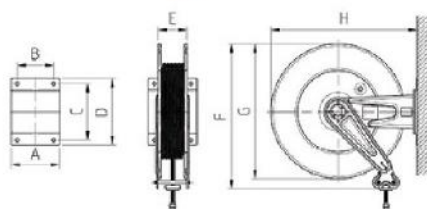

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR WATER 150 °C 400 bar



Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

Article	Hose length	Ø hose	Inlet-outlet
071-1205-300	Without hose	-	M3/8"G - M3/8"G
071-1205-400	Without hose	-	M1/2"G - M1/2"G
071-1205-210	10 m	5/16"	M3/8"G - F3/8"G
071-1205-215	15 m	5/16"	M3/8"G - F3/8"G
071-1205-310	10 m	3/8"	M3/8"G - F3/8"G
071-1205-410	10 m	1/2"	M1/2"G - F1/2"G

071-1305-300	Without hose	-	M3/8"G - M3/8"G
071-1305-400	Without hose	-	M1/2"G - M1/2"G
071-1305-220	20 m	5/16"	M3/8"G - F3/8"G
071-1305-315	15 m	3/8"	M3/8"G - F3/8"G
071-1305-318	18 m	3/8"	M3/8"G - F3/8"G
071-1305-415	15 m	1/2"	M1/2"G - F1/2"G

071-1405-300	Without hose	-	M3/8"G - M3/8"G
071-1405-400	Without hose	-	M1/2"G - M1/2"G
071-1405-320	20 m	3/8"	M3/8"G - F3/8"G
071-1405-325	25 m	3/8"	M3/8"G - F3/8"G
071-1405-420	20 m	1/2"	M1/2"G - F1/2"G

071-1505-300	Without hose	-	M3/8"G - M3/8"G
071-1505-400	Without hose	-	M1/2"G - M1/2"G
071-1505-330	30 m	3/8"	M3/8"G - F3/8"G
071-1505-425	25 m	1/2"	M1/2"G - F1/2"G
071-1505-430	30 m	1/2"	M1/2"G - F1/2"G

S-400



S-460



S-550




S-555



OVERALL DIMENSIONS SWIVELLING

Mod.	A	B	C	D	E	F	G	H	Kg	m³	Nº
S-400	150	120	168	196	95	450	400	510	13,50<20,50	0,046	1
S-460	150	120	168	196	95	480	460	575	17,50<24,00	0,060	1
S-550	200	150	225	270	120	590	550	680	23,00<45,00	0,085	1
S-555	250	200	225	270	170	590	550	680	27,00<54,00	0,100	1

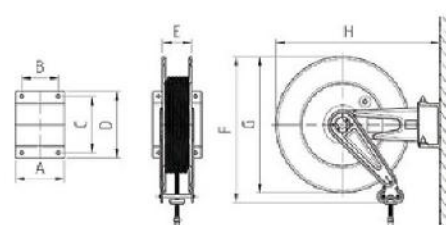

AUTOMATIC HOSE REELS VARNISHED FIXED FOR OIL 160 bar

Equipped with:

- Synthetic black rubber hoses 1SC
- Galvanized connections
- Swivelling joint 90° galvanized
- Polyurethane seals



F-400



F-460



F-550



F-555



F-560

Article	Hose length	Ø hose	Inlet-outlet
070-1206-400	Without hose	-	M1/2"G - M1/2"G
070-1206-310	10 m	3/8"	M1/2"G - M1/2"G
070-1206-410	10 m	1/2"	M1/2"G - M1/2"G

070-1306-400	Without hose	-	M1/2"G - M1/2"G
070-1306-315	15 m	3/8"	M1/2"G - M1/2"G
070-1306-415	15 m	1/2"	M1/2"G - M1/2"G
070-1306-418	18 m	1/2"	M1/2"G - M1/2"G


070-1406-400	Without hose	-	M1/2"G - M1/2"G
070-1406-420	20 m	1/2"	M1/2"G - M1/2"G
070-1406-425	25 m	1/2"	M1/2"G - M1/2"G

070-1506-400	Without hose	-	M1/2"G - M1/2"G
070-1506-500	Without hose	-	M3/4"G - M3/4"G
070-1506-600	Without hose	-	M1"G - M1"G
070-1506-430	30 m	1/2"	M1/2"G - M1/2"G
070-1506-515	15 m	3/4"	M3/4"G - M3/4"G
070-1506-520	20 m	3/4"	M3/4"G - M3/4"G
070-1506-615	15 m	1"	M1"G - M1"G

070-1606-500	Without hose	-	M3/4"G - M3/4"G
070-1606-600	Without hose	-	M1"G - M1"G
070-1606-525	25 m	3/4"	M3/4"G - M3/4"G
070-1606-530	30 m	3/4"	M3/4"G - M3/4"G
070-1606-620	20 m	1"	M1"G - M1"G
070-1606-630	30 m	1"	M1"G - M1"G

OVERALL DIMENSIONS FIXED

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,085	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,100	1
F-560	440	390	225	270	360	590	550	600	33,00<83,00	0,180	1

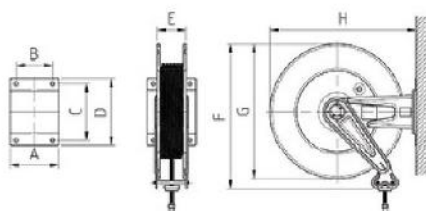

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR OIL 160 bar



Equipped with:

- Synthetic black rubber hoses 1SC
- Galvanized connections
- Swivelling joint 90° galvanized
- Polyurethane seals

Article	Hose length	Ø hose	Inlet-outlet
071-1206-400	Without hose	-	M1/2"G - M1/2"G
071-1206-310	10 m	3/8"	M1/2"G - M1/2"G
071-1206-410	10 m	1/2"	M1/2"G - M1/2"G

071-1306-400	Without hose	-	M1/2"G - M1/2"G
071-1306-315	15 m	3/8"	M1/2"G - M1/2"G
071-1306-415	15 m	1/2"	M1/2"G - M1/2"G
071-1306-418	18 m	1/2"	M1/2"G - M1/2"G

071-1406-400	Without hose	-	M1/2"G - M1/2"G
071-1406-420	20 m	1/2"	M1/2"G - M1/2"G
071-1406-425	25 m	1/2"	M1/2"G - M1/2"G

071-1506-400	Without hose	-	M1/2"G - M1/2"G
071-1506-500	Without hose	-	M3/4"G - M3/4"G
071-1506-600	Without hose	-	M1"G - M1"G
071-1506-430	30 m	1/2"	M1/2"G - M1/2"G
071-1506-515	15 m	3/4"	M3/4"G - M3/4"G
071-1506-520	20 m	3/4"	M3/4"G - M3/4"G
071-1506-615	15 m	1"	M1"G - M1"G

S-400



S-460



S-550




S-555



OVERALL DIMENSIONS SWIVELLING

Mod.	A	B	C	D	E	F	G	H			
S-400	150	120	168	196	95	450	400	510	13,50<20,50	0,046	1
S-460	150	120	168	196	95	480	460	575	17,50<24,00	0,060	1
S-550	200	150	225	270	120	590	550	680	23,00<45,00	0,085	1
S-555	250	200	225	270	170	590	550	680	27,00<54,00	0,100	1

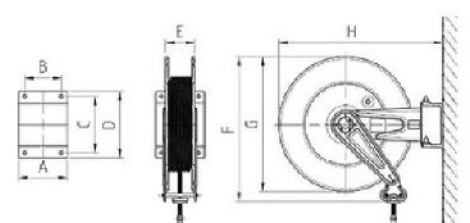

AUTOMATIC HOSE REELS VARNISHED FIXED FOR GREASE 600 bar

Equipped with:

- Synthetic black rubber hoses 2SC
- Galvanized connections
- Swivelling joint 90° galvanized
- Polyurethane seals



F-400

Article	Hose length	Ø hose	Inlet-outlet
070-1207-200	Without hose	-	M1/4"G - M1/4"G
070-1207-300	Without hose	-	M3/8"G - M3/8"G
070-1207-110	10 m	1/4"	M1/4"G - M1/4"G
070-1207-115	15 m	1/4"	M1/4"G - M1/4"G
070-1207-310	10 m	3/8"	M3/8"G - M1/4"G



F-460

070-1307-200	Without hose	-	M1/4"G - M1/4"G
070-1307-300	Without hose	-	M3/8"G - M3/8"G
070-1307-118	18 m	1/4"	M1/4"G - M1/4"G
070-1307-315	15 m	3/8"	M3/8"G - M1/4"G




F-550

070-1407-300	Without hose	-	M3/8"G - M3/8"G
070-1407-320	20 m	3/8"	M3/8"G - M1/4"G
070-1407-325	25 m	3/8"	M3/8"G - M1/4"G



F-555

070-1507-300	Without hose	-	M3/8"G - M3/8"G
070-1507-330	30 m	3/8"	M3/8"G - M1/4"G

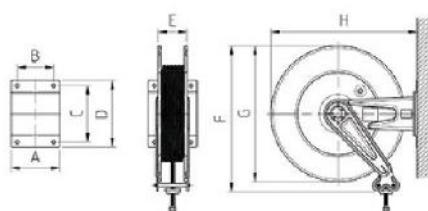

OVERALL DIMENSIONS FIXED

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,085	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,100	1

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR GREASE 600 bar



Equipped with:

- Synthetic black rubber hoses 2SC
- Galvanized connections
- Swivelling joint 90° galvanized
- Polyurethane seals

Article	Hose length	Ø hose	Inlet-outlet
071-1207-200	Without hose	-	M1/4"G - M1/4"G
071-1207-300	Without hose	-	M3/8"G - M3/8"G
071-1207-110	10 m	1/4"	M1/4"G - M1/4"G
071-1207-115	15 m	1/4"	M1/4"G - M1/4"G
071-1207-310	10 m	3/8"	M3/8"G - M1/4"G

S-400



071-1307-200	Without hose	-	M1/4"G - M1/4"G
071-1307-300	Without hose	-	M3/8"G - M3/8"G
071-1307-118	18 m	1/4"	M1/4"G - M1/4"G
071-1307-315	15 m	3/8"	M3/8"G - M1/4"G

S-460



071-1407-300	Without hose	-	M3/8"G - M3/8"G
071-1407-320	20 m	3/8"	M3/8"G - M1/4"G
071-1407-325	25 m	3/8"	M3/8"G - M1/4"G

S-550




071-1507-300	Without hose	-	M3/8"G - M3/8"G
071-1507-330	30 m	3/8"	M3/8"G - M1/4"G

S-555



OVERALL DIMENSIONS SWIVELLING

Mod.	A	B	C	D	E	F	G	H			
S-400	150	120	168	196	95	450	400	510	13,50<20,50	0,046	1
S-460	150	120	168	196	95	480	460	575	17,50<24,00	0,060	1
S-550	200	150	225	270	120	590	550	680	23,00<45,00	0,085	1
S-555	250	200	225	270	170	590	550	680	27,00<54,00	0,100	1

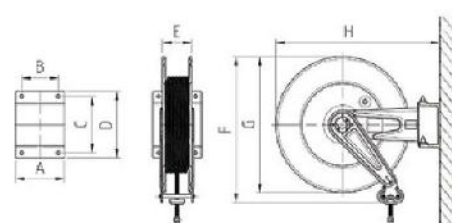

AUTOMATIC HOSE REELS VARNISHED FIXED FOR DIESEL 10 bar

Equipped with:

- Antistatic black rubber hoses
- Galvanized connections
- Swivelling joint 90° galvanized
- Viton seals



F-550

Article	Delivery	Hose length	Ø hose	Inlet-outlet
070-1408-600	95 l/min	Without hose	-	F1"G - M1"G
070-1408-510	90 l/min	10 m	3/4"	F1"G - M1"G
070-1408-515	85 l/min	15m	3/4"	F1"G - M1"G
070-1408-610	95 l/min	10m	1"	F1"G - M1"G




F-555

070-1508-600	95 l/min	Without hose	-	F1"G - M1"G
070-1508-520	83 l/min	20 m	3/4"	F1"G - M1"G
070-1508-615	90 l/min	15 m	1"	F1"G - M1"G



F-560

070-1608-600	95 l/min	Without hose	-	F1"G - M1"G
070-1608-530	80 l/min	30 m	3/4"	F1"G - M1"G
070-1608-540	75 l/min	40 m	3/4"	F1"G - M1"G
070-1608-620	87 l/min	20 m	1"	F1"G - M1"G
070-1608-630	85 l/min	30 m	1"	F1"G - M1"G

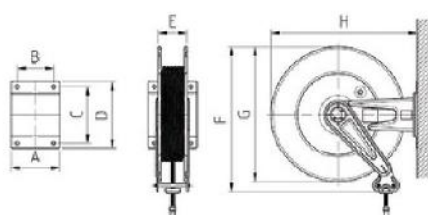

OVERALL DIMENSIONS FIXED

Mod.	A	B	C	D	E	F	G	H			
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,085	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,100	1
F-560	440	390	225	270	360	590	550	600	33,00<83,00	0,180	1

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR DIESEL 10 bar



Equipped with:

- Antistatic black rubber hoses
- Galvanized connections
- Swivelling joint 90° galvanized
- Viton seals

Article	Delivery	Hose length	Ø hose	Inlet-outlet
071-1408-600	95 l/min	Without hose	-	F1"G - M1"G
071-1408-510	90 l/min	10 m	3/4"	F1"G - M1"G
071-1408-515	85 l/min	15m	3/4"	F1"G - M1"G
071-1408-610	95 l/min	10m	1"	F1"G - M1"G

S-550




071-1508-600	95 l/min	Without hose	-	F1"G - M1"G
071-1508-520	83 l/min	20 m	3/4"	F1"G - M1"G
071-1508-615	90 l/min	15 m	1"	F1"G - M1"G

S-555



OVERALL DIMENSIONS SWIVELLING

Mod.	A	B	C	D	E	F	G	H	Kg	m³	N°
S-550	200	150	225	270	120	590	550	680	23,00<45,00	0,085	1
S-555	250	200	225	270	170	590	550	680	27,00<54,00	0,100	1

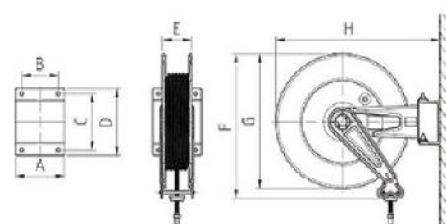

AUTOMATIC HOSE REELS VARNISHED FIXED FOR ANTIFREEZE – WINDSCREEN – ADBLUE 20 bar

Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals



F-400

Article	Hose length	Ø hose	Inlet-outlet
070-1209-400	Without hose	-	M1/2"G – M1/2"G
070-1209-410	10 m	1/2"	M1/2"G – M1/2"G




F-460

070-1309-400	Without hose	-	M1/2"G – M1/2"G
070-1309-415	15 m	1/2"	M1/2"G – M1/2"G



F-550

070-1409-500	Without hose	-	F3/4"G – M3/4"G
070-1409-510	10 m	3/4"	F3/4"G – M3/4"G
070-1409-515	15 m	3/4"	F3/4"G – M3/4"G

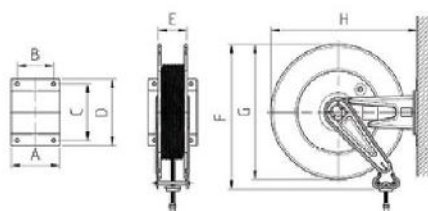

OVERALL DIMENSIONS FIXED

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,085	1

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR ANTIFREEZE – WINDSCREEN – ADBLUE 20 bar



Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals

Article	Hose length	Ø hose	Inlet-outlet
071-1209-400	Without hose	-	M1/2"G - M1/2"G
071-1209-410	10 m	1/2"	M1/2"G - M1/2"G

S-400



071-1309-400	Without hose	-	M1/2"G - M1/2"G
071-1309-415	15 m	1/2"	M1/2"G - M1/2"G

S-460




071-1409-500	Without hose	-	F3/4"G - M3/4"G
071-1409-510	10 m	3/4"	F3/4"G - M3/4"G
071-1409-515	15 m	3/4"	F3/4"G - M3/4"G

S-550



OVERALL DIMENSIONS SWIVELLING

Mod.	A	B	C	D	E	F	G	H			
S-400	150	120	168	196	95	450	400	510	13,50<20,50	0,046	1
S-460	150	120	168	196	95	480	460	575	17,50<24,00	0,060	1
S-550	200	150	225	270	120	590	550	680	23,00<45,00	0,085	1

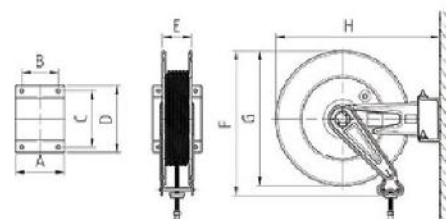

HOSE REELS

AUTOMATIC HOSE REELS VARNISHED FIXED WITHOUT HOSE

F-400



Article	Type of delivery fluid	Swivelling joint 90°	Seals	Inlet-outlet
070-1201-300	Air-water 20 bar	brass	viton	F3/8"G - M3/8"G
070-1201-400	Air-water 20 bar	brass	viton	M1/2"G - M1/2"G
070-1205-300	Water 150°C 400 bar	stainless steel	viton	M3/8"G - M3/8"G
070-1205-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
070-1206-400	Oil 160 bar	galvanized steel	polyurethane	M1/2"G - M1/2"G
070-1207-200	Grease 600 bar	galvanized steel	polyurethane	M1/4"G - M1/4"G
070-1207-300	Grease 600 bar	galvanized steel	polyurethane	M3/8"G - M3/8"G
070-1209-400	Antifreeze-windscreen 20 bar	Stainless steel	viton	M1/2"G - M1/2"G

F-460



070-1301-400	Air-water 20 bar	brass	viton	M1/2"G - M1/2"G
070-1305-300	Water 150°C 400 bar	stainless steel	viton	M3/8"G - M3/8"G
070-1305-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
070-1306-400	Oil 160 bar	galvanized steel	polyurethane	M1/2"G - M1/2"G
070-1307-200	Grease 600 bar	galvanized steel	polyurethane	M1/4"G - M1/4"G
070-1307-300	Grease 600 bar	galvanized steel	polyurethane	M3/8"G - M3/8"G
070-1309-400	Antifreeze-windscreen 20 bar	stainless steel	viton	M1/2"G - M1/2"G

F-550



070-1401-400	Air-water 20 bar	brass	viton	M1/2"G - M1/2"G
070-1405-300	Water 150°C 400 bar	stainless steel	viton	M3/8"G - M3/8"G
070-1405-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
070-1406-400	Oil 160 bar	galvanized steel	polyurethane	M1/2"G - M1/2"G
070-1407-300	Grease 600 bar	galvanized steel	polyurethane	M3/8"G - M3/8"G
070-1408-600	Diesel 10 bar	galvanized steel	viton	F1"G - M1"G
070-1409-500	Adblue 20 bar	stainless steel	viton	F3/4"G - M3/4"G

F-555



070-1502-400	Air-water 20 bar	brass	viton	M1/2"G - M1/2"G
070-1502-600	Air-water 20 bar	brass	viton	F1"G - M1"G
070-1505-300	Water 150°C 400 bar	stainless steel	viton	M3/8"G - M3/8"G
070-1505-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
070-1506-400	Oil 160 bar	galvanized steel	polyurethane	M1/2"G - M1/2"G
070-1506-500	Oil 160 bar	galvanized steel	polyurethane	M3/4"G - M3/4"G
070-1506-600	Oil 160 bar	galvanized steel	polyurethane	M1"G - M1"G
070-1507-300	Grease 600 bar	galvanized steel	polyurethane	M3/8"G - M3/8"G
070-1508-600	Diesel 10 bar	galvanized steel	viton	F1"G - M1"G


F-560



070-1602-600	Air-water 20 bar	brass	viton	F1"G - M1"G
070-1605-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
070-1606-500	Oil 160 bar	galvanized steel	polyurethane	M3/4"G - M3/4"G
070-1606-600	Oil 160 bar	galvanized steel	polyurethane	M1"G - M1"G
070-1608-600	Diesel 10 bar	galvanized steel	viton	F1"G - M1"G

OVERALL DIMENSIONS FIXED

Mod.	A	B	C	D	E	F	G	H	Kg	m³	Nº
F-400	158	120	168	192	95	450	400	435	12,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00	0,085	1
F-555	250	200	225	270	170	590	550	600	26,00	0,100	1
F-560	440	390	225	270	360	590	550	600	33,00	0,180	1

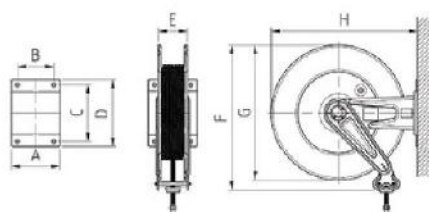

AUTOMATIC HOSE REELS VARNISHED SWIVELLING WITHOUT HOSE



Article	Type of delivery fluid	Swivelling joint 90°	Seals	Inlet-outlet
071-1201-300	Air-water 20 bar	brass	viton	F3/8"G - M3/8"G
071-1201-400	Air-water 20 bar	brass	viton	M1/2"G - M1/2"G
071-1205-300	Water 150°C 400 bar	stainless steel	viton	M3/8"G - M3/8"G
071-1205-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
071-1206-400	Oil 160 bar	galvanized steel	polyurethane	M1/2"G - M1/2"G
071-1207-200	Grease 600 bar	galvanized steel	polyurethane	M1/4"G - M1/4"G
071-1207-300	Grease 600 bar	galvanized steel	polyurethane	M3/8"G - M3/8"G
071-1209-400	Antifreeze-windscreen 20 bar	Stainless steel	viton	M1/2"G - M1/2"G
071-1301-400	Air-water 20 bar	brass	viton	M1/2"G - M1/2"G
071-1305-300	Water 150°C 400 bar	stainless steel	viton	M3/8"G - M3/8"G
071-1305-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
071-1306-400	Oil 160 bar	galvanized steel	polyurethane	M1/2"G - M1/2"G
071-1307-200	Grease 600 bar	galvanized steel	polyurethane	M1/4"G - M1/4"G
071-1307-300	Grease 600 bar	galvanized steel	polyurethane	M3/8"G - M3/8"G
071-1309-400	Antifreeze-windscreen 20 bar	stainless steel	viton	M1/2"G - M1/2"G
071-1401-400	Air-water 20 bar	brass	viton	M1/2"G - M1/2"G
071-1405-300	Water 150°C 400 bar	stainless steel	viton	M3/8"G - M3/8"G
071-1405-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
071-1406-400	Oil 160 bar	galvanized steel	polyurethane	M1/2"G - M1/2"G
071-1407-300	Grease 600 bar	galvanized steel	polyurethane	M3/8"G - M3/8"G
071-1408-600	Diesel 10 bar	galvanized steel	viton	F1"G - M1"G
071-1409-500	Adblue 20 bar	stainless steel	viton	F3/4"G - M3/4"G
071-1502-400	Air-water 20 bar	brass	viton	M1/2"G - M1/2"G
071-1502-600	Air-water 20 bar	brass	viton	F1"G - M1"G
071-1505-300	Water 150°C 400 bar	stainless steel	viton	M3/8"G - M3/8"G
071-1505-400	Water 150°C 400 bar	stainless steel	viton	M1/2"G - M1/2"G
071-1506-400	Oil 160 bar	galvanized steel	polyurethane	M1/2"G - M1/2"G
071-1506-500	Oil 160 bar	galvanized steel	polyurethane	M3/4"G - M3/4"G
071-1506-600	Oil 160 bar	galvanized steel	polyurethane	M1"G - M1"G
071-1507-300	Grease 600 bar	galvanized steel	polyurethane	M3/8"G - M3/8"G
071-1508-600	Diesel 10 bar	galvanized steel	viton	F1"G - M1"G

S-400



S-460



S-550



S-555



OVERALL DIMENSIONS SWIVELLING



Mod.	A	B	C	D	E	F	G	H			
S-400	150	120	168	196	95	450	400	510	13,50	0,046	1
S-460	150	120	168	196	95	480	460	575	17,50	0,060	1
S-550	200	150	225	270	120	590	550	680	23,00	0,085	1
S-555	250	200	225	270	170	590	550	680	27,00	0,100	1

